




American Accessories, Inc.
 Phone (877) 465-5005
 Fax (877) 465-4090

Arkansas Series: AR Angle Mirrors

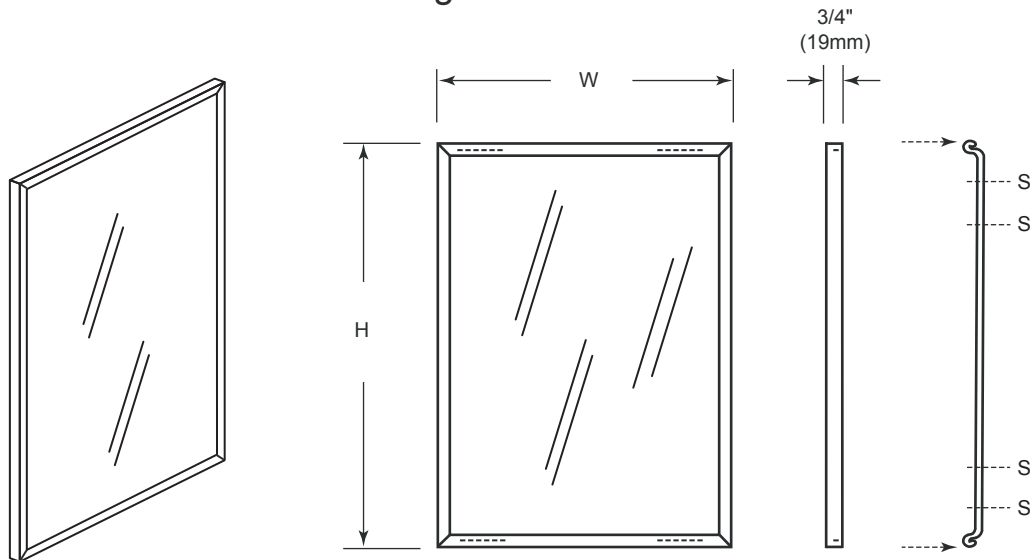

SPECIFICATIONS:

- Frame - 5/8"(16mm) x 5/8"(16mm) one piece roll formed angle. All corners are heliarc welded and ground smooth.
- 18 gauge 18-8 type 304 stainless steel with a #4 satin finish.
- Mirror - 1/4"(6mm) polished float plate clear glazing No. 1 quality glass mirror, electrolytically copper-plated, baked enamel backing with water resistant padding. Guaranteed against silver spoilage for 25 years.
- Cushioning - waterproof ethafoam strips with provisions for ventilation.
- Back plate - fabricated out of corrosive resistant galvanized steel with pre-punched mounting holes. Rolled lock formed on all four(4) sides.

INSTALLATION:

- Disassemble the frame. Mount backplate to wall using screw holes nearest the rolled formed edge. Center mirror on backplate. Starting at bottom center snap frame over rolled flange. Continue snapping toward bottom corners then up the sides and across the top.

STANDARD FRAME SIZES: (wxh)

- | | |
|--|---|
| <input type="checkbox"/> 18"(457mm) x 30"(762mm) | <input type="checkbox"/> <input type="checkbox"/> 16"(406mm) x 20"(508mm) |
| <input type="checkbox"/> 18"(457mm) x 36"(914mm) | <input type="checkbox"/> <input type="checkbox"/> 16"(406mm) x 24"(610mm) |
| <input type="checkbox"/> 24"(610mm) x 30"(762mm) | <input type="checkbox"/> <input type="checkbox"/> 24"(610mm) x 36"(914mm) |
| <input type="checkbox"/> 18"(457mm) x 24"(610mm) | |

SPECIAL SIZES AVAILABLE:

- Sizes from 12"(305mm) W x 12"(305mm) H to 144"(3,658mm) W x 72"(1,829mm) H.

NOTE:

- All mirrors are fabricated to overall width and height dimensions. Specify width and height in inches.

ADA:

- Bottom edge of reflective surface should be mounted 40"(1,016mm) above the finished floor.

OPTIONS:

- Tempered glass - specify suffix "T".
- Bright finish - specify suffix "B".