




American Accessories, Inc.
Phone (877) 465-5005
Fax (877) 465-4090

South Dakota Series: SD-16AP Soap Dispenser

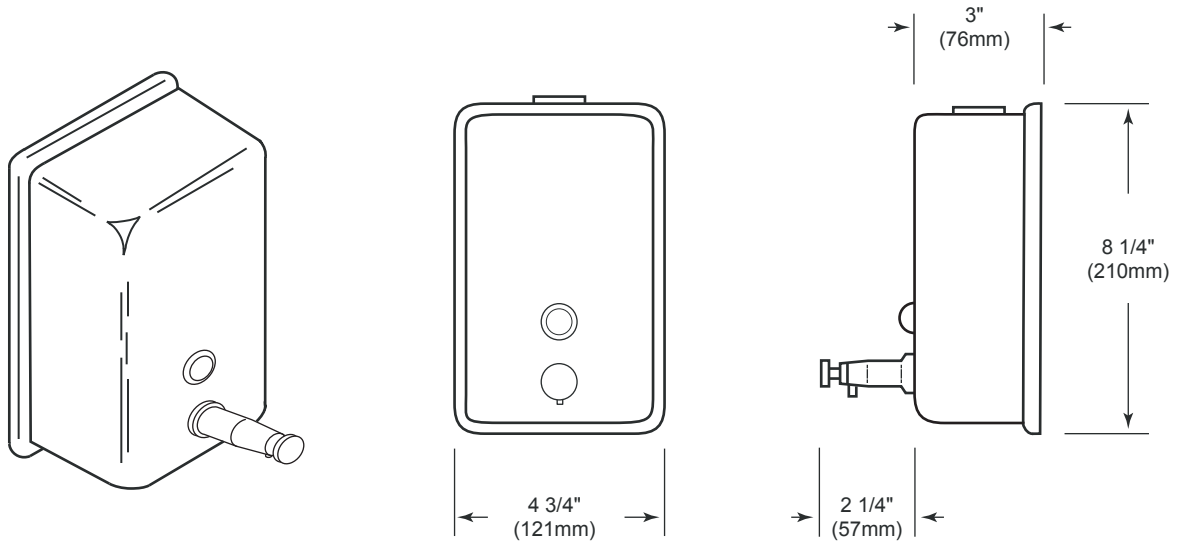

SPECIFICATIONS:

- Unit fabricated of 20 gauge type 304 stainless steel with #4 satin finish. Body of dispenser is heliarc welded to back panel.
- Valve is corrosion resistant, all purpose chrome-plated brass with inside parts stainless steel and plastic. All purpose valves dispense viscous synthetic lotion soaps. View level indicator is clear plastic.

CAPACITY:

- 48 ounces of liquid soap.

INSTALLATION:

- Mount wall plate on wall surface with screws provided. Unlock and lift filler plate. Unscrew machine screw, which goes through back panel of unit, slip dispenser over wall plate and tighten machine screw until secure.

OVERALL DIMENSIONS:

- 4 3/4" W x 8 1/4" H x 5 1/4" D
- (121mm W x 210mm H x 133mm D)

MOUNTING:

- Mounting location for push button dispenser is 44"(1,118mm) maximum above the finished floor.

ADA GUIDELINES:

- Push buttons and pistons should be operable with one hand and without tight grasping, pinching or twisting of the wrist.
- Activation of soap valves should not require more than 5 pounds of force when unit is completely filled.