




American Accessories, Inc.

Phone (877) 465-5005

Fax (877) 465-4090

Texas Series: TX-5 Towel Dispenser & Waste Receptacle

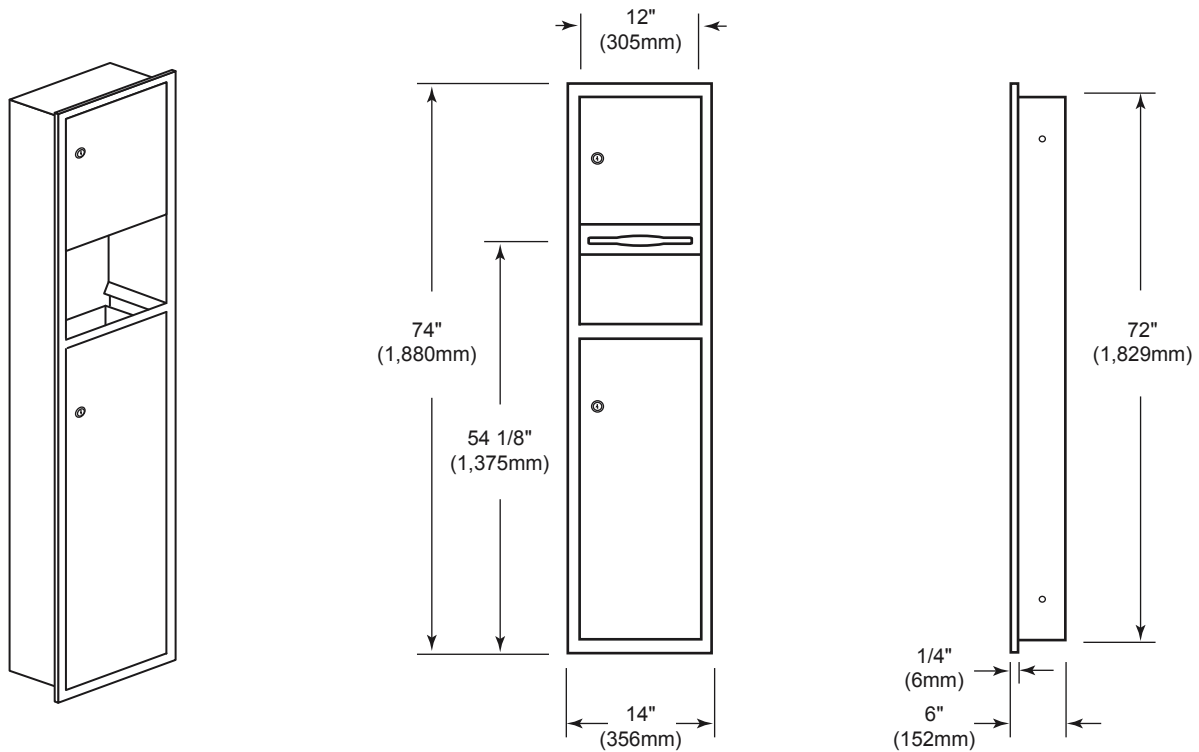

SPECIFICATIONS:

- Unit fabricated of 18-8 type 304 stainless steel with #4 satin finish. Door is 18 gauge, mounted with continuous stainless steel piano hinge, and fitted with two (2) tumbler locks. One piece seamless 22 gauge flange constructed with 1/4"(6mm) return for rigidity. Waste receptacle is removable for servicing. All welded construction.

CAPACITY:

Towel dispenser: 1,100 single-fold or 600 C-fold or 800 multi-fold towels. Waste receptacle: 10 gallon (37.8L).

OVERALL DIMENSIONS:

- 14" W x 74" H x 6" D
- (356mm W x 1,880mm H x 152mm D)

WALL OPENING:

- 12 1/2" W x 72 1/2" H x 6" D
- (318mm W x 1,842mm H x 152mm D)

INSTALLATION:

- Provide framed wall opening of 12 1/2"(318mm)W x 72 1/2"(1,842mm)H. Recessed depth required is 6"(152mm) from the finished floor. Coordinate plans with mechanical engineers to avoid protrusion from opposite walls, pipes, conduits, electrical wires, etc. If installing where unit projects above wainscot, provide filler to prevent gaps. If installing in block walls, use metal expansion shields.

OPTIONS:

- TX-5F similar to TX-5 except with 2"(51mm) skirt for semi-recessing.
- TX-5FS similar to TX-5 except with 6"(152mm) skirt for surface mounting.

ADA GUIDE:

- Access to paper towels should be 15"(381mm) to 48"(1,219mm) above the finished floor. Hinged panels should not require more than 5 lbs. of force to open. Units should not project more than 4"(102mm) from the wall. Operable with one hand and without pinching, grasping, or twisting of the wrist. Activation should not require more than 5 lbs. of force when completely filled.