




American Accessories, Inc.  
Phone (877) 465-5005  
Fax (877) 465-4090

## Vermont Series: VT-6 Partition Toilet Tissue Dispenser

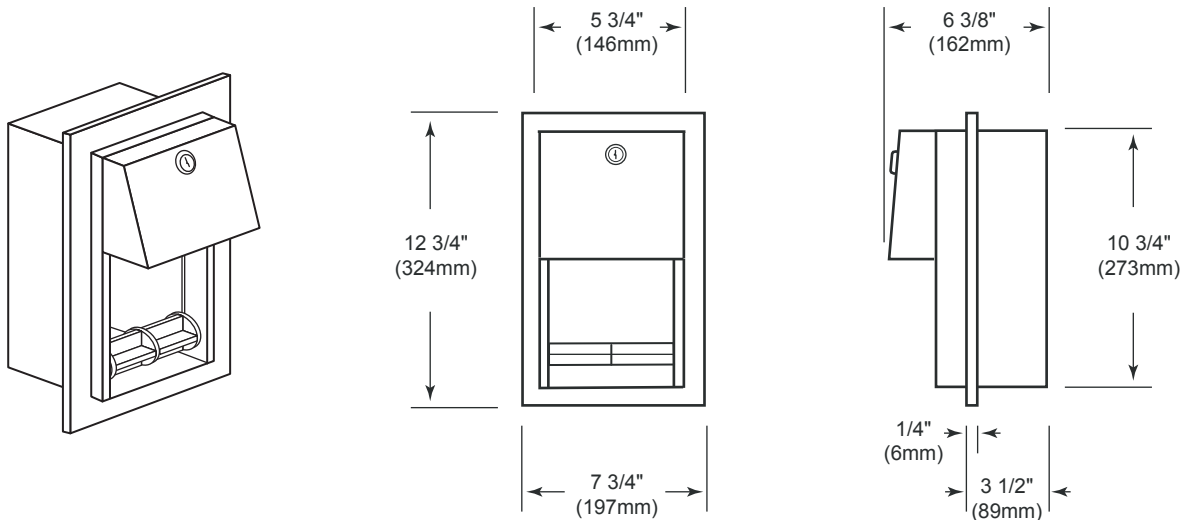

### SPECIFICATIONS:

- Unit fabricated of 18 and 22 gauge, 18-8 type 304 stainless steel with #4 satin finish. Door is fabricated of 18 gauge stainless steel, attaches with heavy duty rivets, and is fitted with a tumbler lock. One piece seamless flange is fabricated of 22 gauge stainless steel and has a 1/4" (6mm) 90 degree return for rigidity. Dispensing mechanism and inner cabinet are constructed of 18 and 22 gauge stainless steel. All welded construction. Spindles are a one piece molded ABS polyethylene with stainless steel tips to prevent damage when roll automatically drops in place. Roller cannot be removed when door is locked. Toilet tissue rolls are loaded and locked into dispensing mechanism. Extra roll automatically drops in place after bottom roll is depleted.

### CAPACITY:

Unit holds two(2) standard core toilet tissue rolls up to 5 1/4" (133mm) in diameter, approximately 1,800 sheets.

### OVERALL DIMENSIONS:

- 7 3/4" W x 12 3/4" H x 6 3/8" D  
(197mm W x 324mm H x 162mm D)

### WALL OPENING:

- 6 1/4" W x 11 1/4" H x 3 1/2" D  
(159mm W x 286mm H x 89mm D)

### INSTALLATION:

Provide framed wall opening of 6 1/4" (159mm)W x 11 3/8" (289mm)H. Recessed depth required is 3 1/2" (89mm) from the finished floor. Coordinate plans with mechanical engineers to avoid protrusion from opposite wall, pipes, conduits, electrical wires, etc. If installing where unit projects above wainscot, provide filler to prevent gap. If installing in block walls, use metal expansion shields.

### MOUNTING:

Mount unit 37" (940mm) to top of unit.

### NOTE:

- Available in titanium gold, add suffix "TG".
- Available in polished #8 mirror 18-8 type 304 stainless steel.

### ADA MOUNTING GUIDE:

Toilet tissue rolls should be mounted with forward edge no more than 36" (914mm) from the back wall of stall. All toilet tissue dispensers should be mounted with their horizontal centerline at least 19" (483mm) from the finished floor.